


# WIFI module cloud mode

1. Click 'Add To' and Scan QR code or Manually type in.



2. Choose the gateway (communication device)

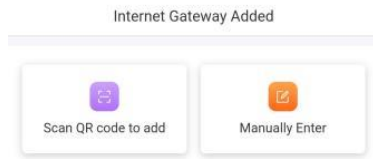

### 3. Write the Gateway Name and 22numbers.

< Internet Gateway Added

---

Gateway Name:  
20221021123456789026

---

Gateway SN:  
20221021123456789026

---

Related Plant:  
admin1\_2022-10-26 16:22:12 >

Default Plant


Location:  
102299, Changping District, Beijing, People's  
Republic of China


Next Step

### 4. Turn to add device

< Add device

---

 Scan QR code













 Type in

## 5. Choose Device

< Add device

Q Please enter the product series name.

Product Range Selection:

|   |  |   |
|---|--|---|
| <br>TRACER-CPN             | <br>SIGFI1.5K | <br>UP-HI              |
| <br>Solar household system | <br>IPT       | <br>HP-AL-S            |
| <br>TP                     | <br>TRIRON    | <br>TRACER-AN(50-100A) |
| <br>                       | <br>          | <br>                   |

For the device QR code starting with 03, 04,05 etc can be scanned, but starting with code WO can not be scanned

## 6. Type in device information

< Add device

Device SN:  
2023022812345678900001

Device Name:  
XTRA-N

Organization:  
默认组织

Gateway:  
20230228123456789001

Communication ID Number:  
1


Tips:  
For communication ID: Please input 1 for controller and hybrid power supply, and 3 for inverter. for all-in-one machine, 10 for UP-HI and UPower, and 1 for others.

Next Step

## 7. Click Next Step

Ready To Go Online

---



Click here to configure the network

Tips:  
1. Please keep the equipment and mobile phone close.  
2. Make sure you are in a place with good Wi-Fi signal.  
3. If there is no Wi-Fi available at present, you can skip networking and conduct distribution operations in the gateway list later.

Jump

## 8. Configure Gateway WI-FI

< Configure Gateway Wi-Fi

---

📶 HNJD ▾


🔒 ..... 👁

Next Step


## 9. Click Set Up Mobile Wi-Fi





## 10. Connect WIFI (HN\_EPxxxxx password:12345678), then back to APP

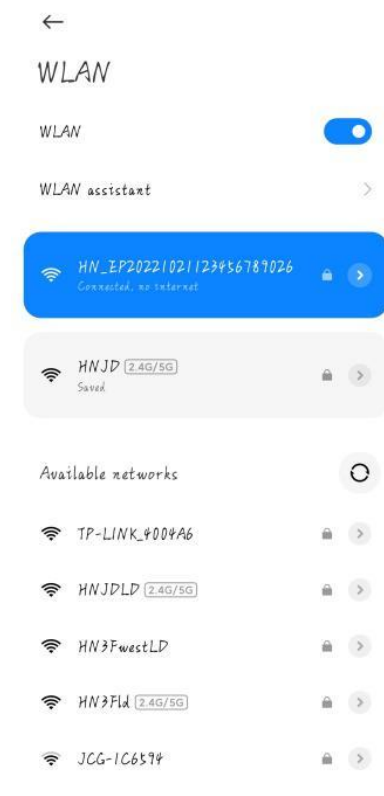

## 11. Click 'Next step'




## 12. Setting Succeeded- back to Phone WIFI Setting-Re-switch the WIFI that can access the Internet- Check the real-time data

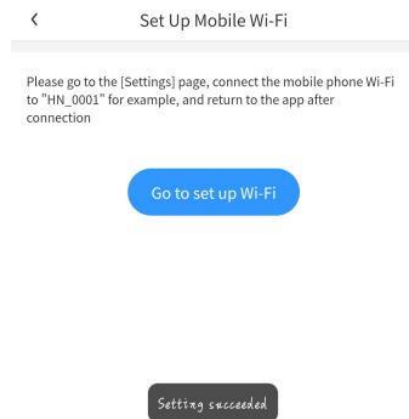


# WIFI dongle local mode

## 1. register account- Login in APP-My-Collect Data-Synchronize Data

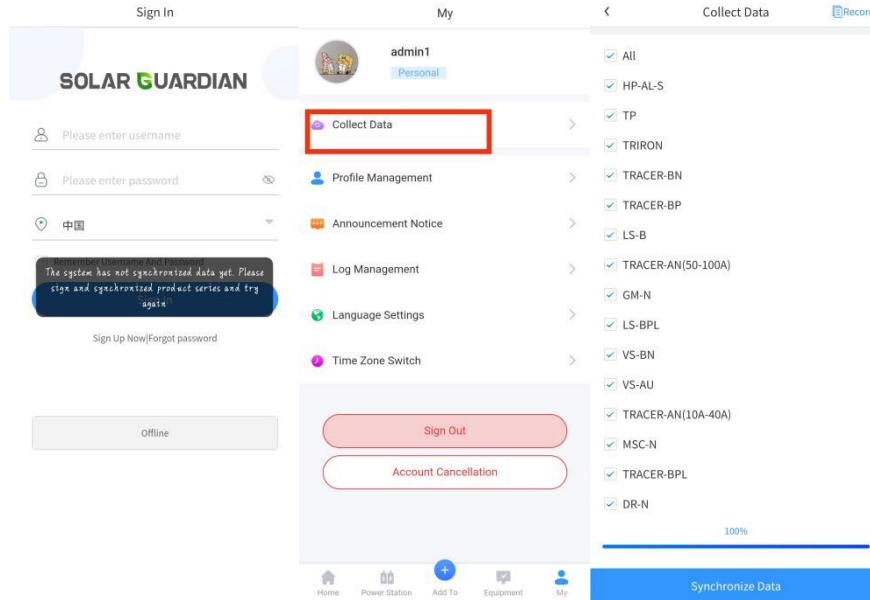

## 2. Home-Click 'offline'

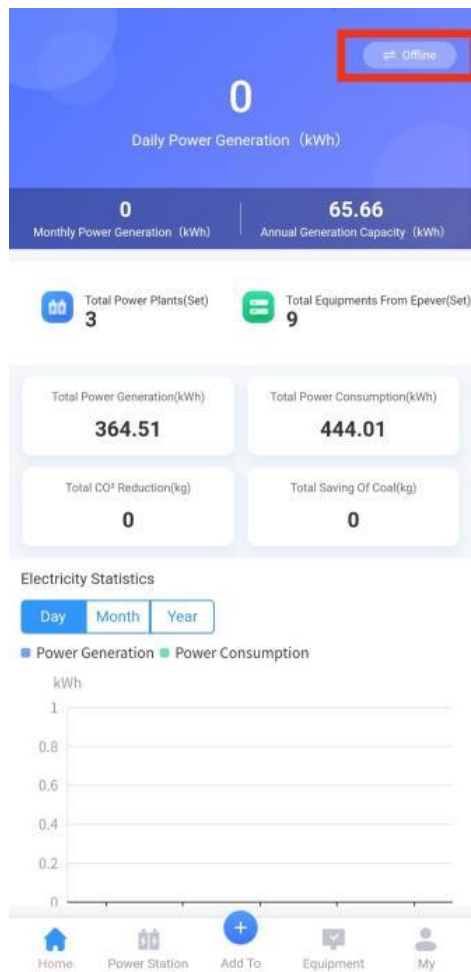


### 3. Click WIFI





### 4. Setting WIFI- Connect WiFi HN\_EPXXXXXXX

- Default password: 12345678

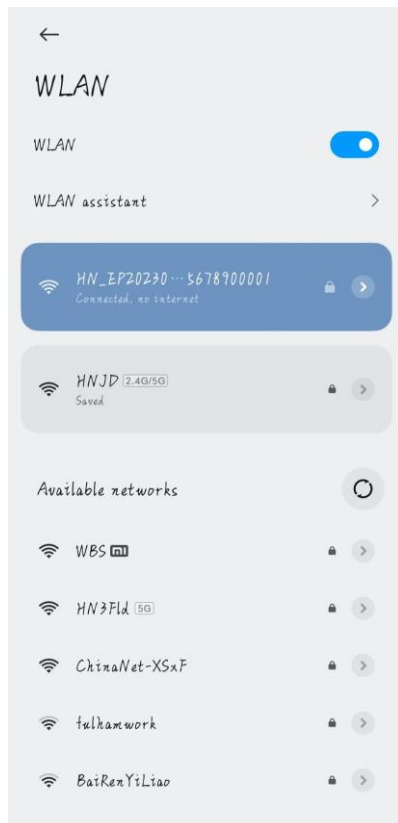



5. Connected successfully- Back to APP- Click device list- Add device, Scan on the Wifi dongle.

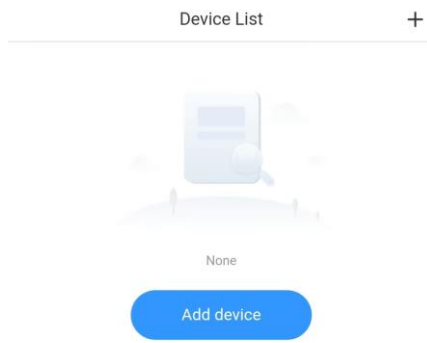

6. Type Device custom name, SN number, select products series, choose ID (Default: controller=1, inverter=3, inverter/charger=10)

< Product Range Selection

Device Custom Name  
XTRA-N

Gateway SN  
2023022012345678900001

Select products series  
XTRA-N

Communication ID Number  
- 1 +

Tips:  
For communication ID: Please input 1 for controller and hybrid power supply, and 3 for inverter. for all-in-one machine, 10 for UP-HI and UPower, and 1 for others.

Confirm

## 7. Click Gateway SN, get into Real time data

Device List + < xtra ...

XTRA-N

Gateway SN: 2023022012345678900001

Equipment configuration

Real-time data

search

Statistical information

|                                    |      |   |
|------------------------------------|------|---|
| Cumulative charge (day)            | 0kWh | ↻ |
| Cumulative charge (months)         | 0kWh | ↻ |
| Cumulative charge capacity (years) | 0kWh | ↻ |
| Cumulative charge (total)          | 0kWh | ↻ |
| Cumulative electricity             | ...  | ↻ |

Communication Device